



FORCE **SIoux** TOOLS

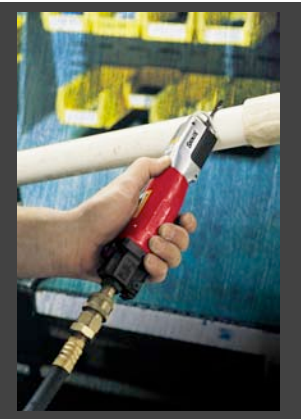

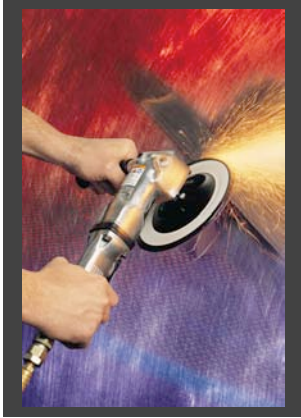

FORCE TOOLS

The Force of the Tool Industry

Many businesses require tools that can deliver high performance but are not subject to the constant demands of Industrial applications. To meet these requirements, Sioux developed the Force line. The Force line-up is designed primarily for the MRO (Maintenance Repair Operations) and manufacturing support functions, however the quality of these tools will allow them to go beyond these typical support applications to fit the bill in many of your manufacturing processes.

Force tools are designed to complement the durability and performance of our industrial line. Check out the following line of Force tools in this catalogue.

Product	Page
Drills	1 - 2
Impact Wrenches	3 - 8
Ratchet Wrenches	9
Grinders	10 - 11
Sanders	12 - 13
Hammers & Scalers	14 - 15
Speciality Tools	16

Pistol Grip Drills

3/8" (10mm) Drill

Model No. 5445RKL



CE

- Keyless chuck
- Reversible
- Aluminium housing
- Chuck capacity: 3/8" (10mm)
- Free Speed: 180" (200mm)
- Weight: 3.0 lb (1.4 kg)
- Length: 8.0" (200mm)
- Air inlet size: _" NPT
- Recommended hose size: 3/8" (10mm)
- Standard stock

3/8" (10mm) Drill

Model No. 5440KL



CE

- Keyless chuck
- Non-reversible
- Aluminium housing
- Chuck capacity: 3/8" (10mm)
- Free speed: 2300 rpm
- Weight: 2.1lb (1.0 kg)
- Length: 7.5" (190mm)
- Air inlet size: _" NPT
- Recommended hose size: 3/8" (10mm)
- Standard stock

3/8" (10mm) Drill

Model No. 5445R



CE

- Keyed chuck
- Reversible
- Aluminium housing
- Chuck capacity: 3/8" (10mm)
- Free speed: 1800 rpm
- Weight: 3.0 lb (1.4 kg)
- Length: 8.0" (200mm)
- Air inlet size: _" NPT
- Recommended hose size: 3/8" (10mm)
- Standard stock

1/2" (13mm) Drill

Model No. 5450R



CE

- Keyed chuck
- Reversible
- Aluminium housing
- Support handle
- Free speed: 550 rpm
- Chuck capacity: 1/2" (13mm)
- Weight: 4.3 lb (1.95 kg)
- Length: 9.25" (235mm)
- Air inlet size: _" NPT
- Recommended hose size: 3/8" (10mm)
- Standard stock

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Inline Drills

3/8" (10mm) Inline Air Drill

Model No. 5434KL



- Keyless chuck
- Non-reversible
- Aluminium housing
- Lock-off level throttle
- Rear exhaust
- Built-in speed regulator
- Chuck capacity: 3/8" (10mm)
- Free speed: 2500 rpm
- Weight: 2.0lb (0.9 kg)
- Length: 8.0" (200mm)
- Air inlet size: 1/2" NPT
- Recommended hose size 3/8" (10mm)
- Available to order

Right Angle Drills

3/8" (10mm) Right Angle Drill

Model No. 5430KL



- Keyless chuck
- Reversible
- Aluminium housing
- Rear exhaust
- Built-in speed regulator
- Free speed 1200rpm
- Chuck capacity: 3/8" (10mm)
- Weight: 2.5lb (1.1 kg)
- Length: 8.0" (200mm)
- Air inlet size: 1/2" NPT
- Recommended hose size: 3/8" (10mm)
- Available to order

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

3/8" (10mm) Impact Wrenches

3/8" (10mm) Inline Impact Wrench

Model No. 5035



- Lever start
- Suspension bail
- Steel anvil housing
- Twin hammer impact mechanism
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity 3/8" (10mm)
- Drive size 3/8" (10mm)
- Working torque range 5-60 ft lb (7-81 Nm)
- Max torque 80 ft lb (108 Nm)
- Free speed 7000rpm
- Blows per minute 1200
- Weight: 2.7 lb (1.2 kg)
- Length: 8.6" (218 mm)
- Air inlet size: 1/2" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.6 cfm (102l/s) max
- Available to order

CE

3/8" (10mm) Impact Wrench

Model No. 5038B



- Reverse bias power
- Pin style impact mechanism
- Oil bath lubrication
- Built-in power regulator
- Moulded comfort grip
- Friction ring socket retainer
- Grade 5 bolt capacity 3/8" (10mm)
- Drive size 3/8" (10mm)
- Working torque range 50-160 ft lb (68-217 Nm)
- Max torque 185 ft lb (251 Nm)
- Free speed: 8500 rpm
- Blows per minute 1160
- Weight: 3.07lb (1.7 kg)
- Length: 6.3" (160mm)
- Air inlet size: 1/2" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max
- Available to order

CE

3/8" (10mm) Impact Wrench

Model No. 5039B



- Reverse bias power
- Pin style impact mechanism
- Oil bath lubricant
- Moulded comfort grip
- Built-in power regulator
- Pin socket retainer
- Grade 5 bolt capacity 3/8" (10mm)
- Drive size 3/8" (10mm)
- Working torque 50-160 ft lb (68-217 Nm)
- Max. torque 185 ft lb (251 Nm)
- Free speed 8500 rpm
- Blows per minute 1,160
- Weight: 3.7lb (1.7 kg)
- Length: 6.3" (160mm)
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.4 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.
- Available to order

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

1/2" (13mm) Impact Wrenches

1/2" (13mm) Impact Wrench

Model No. 5000



- Twin hammer impact mechanism
- Front exhaust
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity 5/8" (16mm)
- Drive size 1/2" (13mm)
- Working torque 25-300 ft lb (34-407 Nm)
- Max. torque 425 ft lb (576 Nm)
- Free speed: 8000 rpm
- Blows per minute 1,200
- Weight: 5.6lb (2.5 kg)
- Length: 7.4" (188 mm)
- Air inlet size: 1/2" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 4.2cm (120 l/s) avg. – 16.8 cfm (475 l/s) max.
- Available to order

CE

1/2" (13mm) Impact Wrench

Model No. 5050A




- Reverse bias power
- Twin hammer impact mechanism
- Built-in power regulator
- Down handle exhaust
- Steel anvil housing
- Friction ring socket retainer
- Grade 5 bolt capacity 5/8" (16mm)
- Drive size 1/2" (13mm)
- Working torque 50 –350 ft lb (68-474 Nm)
- Max. torque 475 ft lb (644 Nm)
- Free speed: 8,000 rpm
- Blows per minute 1100
- Weight: 5.6lb (2.5 kg)
- Length: 7.4" (188mm)
- Air inlet size: 1/2" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.6 cfm (102 l/s) avg. – 14.5 cfm (410 l/s) max.
- Standard stock

CE

1/2" (13mm) Impact Wrench

Model No. 5000L

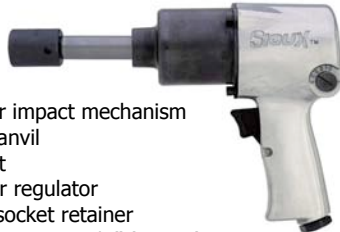

- Twin hammer impact mechanism
- 2" extended anvil
- Front exhaust
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity 5/8" (16mm)
- Drive size 1/2" (13mm)
- Working torque 25-300 ft lb (34-407 Nm)
- Max. torque 425 ft lb (576 Nm)
- Blows per minute 1,200
- Free Speed: 8000 rpm
- Weight: 5.6 lb (2.5 kg)
- Length: 9.4" (240mm)
- Air inlet size: 1/2" NPT
- Recommended hose size: 3/8" (10mm)
- Air consumption 4.2 cfm (120 l/s) avg. – 16.8 cfm (475 l/s) max.
- Available to order

CE

1/2" (13mm) Impact Wrench

Model No. 5051A



- Reverse bias power
- Twin hammer impact mechanism
- Built-in power regulator
- Down handle exhaust
- Steel anvil housing
- Pin socket retainer
- Grade 5 bolt capacity 1/22 (13mm)
- Drive size 1/2" (13mm)
- Working torque 50-350 ft lb (68-474 Nm)
- Max. torque 475 ft lb (644 Nm)
- Free speed: 8000 rpm
- Blows per minute 1,100
- Weight: 5.6lb (2.5 kg)
- Length: 7.4" (188mm)
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.
- Standard stock

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

1/2" (13mm) Impact Wrenches

1/2" (13mm) Impact Wrench

Model No. 5250A



- Reverse bias power
- Pin style impact mechanism
- Oil bath lubrication
- Built-in power regulator
- Moulded comfort grip
- Friction ring socket retainer
- Grade 5 bolt capacity 5/8" (16mm)
- Drive size 1/2" (13mm)
- Working torque 50-375
- Max. torque 525 ft lb (712 Nm)
- Free speed: 7000 rpm
- Blows per minute 985
- Weight: 6.0 lb (2.7 kg)
- Length: 7.7" (196mm)
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.
- Standard stock

1/2" (13mm) Impact Wrench

Model No. 5050AL



- Reverse bias power
- Twin hammer impact mechanism
- Oil bath lubrication
- 2" extended anvil
- Down handle exhaust
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity 5/8" (16mm)
- Drive size 1/2" (13mm)
- Working torque 50-350 ft lb (68-474 Nm)
- Max. torque 450 ft lb (610 Nm)
- Free speed: 8000 rpm
- Blows per minute 1,100
- Weight: 5.8 lb (2.6 kg)
- Length: 9.4" (239mm)
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.
- Standard stock



SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

3/4" (19mm) Impact Wrenches

3/4" (19mm) Impact Wrench

Model No. 5075A



- Aluminium housing
- Steel anvil
- Roller cam impact mechanism
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity 3/4" (19mm)
- Drive size 3/4" (19mm)
- Working torque 300-800 ft lb (34-1084 Nm)
- Max. torque 1200 ft lb (1627 Nm)
- Free speed: 4500 rpm
- Blows per minute 870
- Weight: 12.6lb (5.7 kg)
- Length: 10.2" (259 mm)
- Recommended hose size 1/2" (13mm)
- Air consumption 5.8cm (164 l/s) avg. – 23.2 cfm (655 l/s) max.
- Standard stock

CE

3/4" (19mm) Impact Wrench

Model No. 5075AL



- Roller cam impact mechanism
- 6" (152mm) extended anvil
- Oil bath lubrication
- Moulded comfort grip
- Built-in power regulator
- Friction ring socket retainer
- Grade 5 bolt capacity 3/4" (19mm)
- Drive size 3/4" (19mm)
- Working torque 300-800 ft lb (34-1084 Nm)
- Max. torque 1200 ft lb (1627 Nm)
- Free Speed: 4500 rpm
- Blows per minute 870
- Weight: 15.7 lb (7.1 kg)
- Length: 16.2" (411mm)
- Recommended hose size: 1/2" (13mm)
- Air consumption 5.8 cfm (164 l/s) avg. – 23.2 cfm (655 l/s) max.
- Standard stock

CE



SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

1" (25mm) Impact Wrenches

1" (25mm) Impact Wrench

Model No. 5090A



CE

- Pin impact mechanism
- Oil bath lubrication
- Built-in speed regulator
- Support handle
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity 1-3/8" (35mm)
- Drive size 1" (25mm)
- Working torque 600-1000 ft lb (813-1356 Nm)
- Max torque 1500 ft lb (2034 Nm)
- Free speed 3800rpm
- Blows per minute 500
- Weight: 22.0 lb (10.0 kg)
- Length: 11.6" (295 mm)
- Recommended hose size 3/4" (19mm)
- Air consumption 10.0 cfm (282 l/s) avg. – 40 cfm (1130 l/s) max.
- Available to order

1" (25mm) High Torque Impact Wrench

Model No. 5092



CE

- Reverse bias power
- Pin style impact mechanism
- Oil bath lubrication
- Built-in power regulator
- Moulded comfort grip
- Friction ring socket retainer
- Grade 5 bolt capacity 3/8" (10mm)
- Drive size 3/8" (10mm)
- Working torque range 50-160 ft lb (68-217 Nm)
- Max torque 185 ft lb (251 Nm)
- Free speed: 8500 rpm
- Blows per minute 1160
- Weight: 307lb (1.7 kg)
- Length: 6.3" (160mm)
- Air inlet size: 1/2" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max
- Available to order

1" (25mm) Impact Wrench

Model No. 5090AL



CE

- Built-in power regulator
- Swivel air inlet bushing
- Vinyl boot
- Friction ring socket retainer
- Grade 5 bolt capacity 3/8" (10mm)
- Drive size 3/8" (10mm)
- Working torque range 5-50 ft lb (7-68 Nm)
- Max torque 55 ft lb (75 Nm)
- Free speed 10,000rpm
- Blows per minute 1200
- Weight: 1.9 lb (0.9 kg)
- Length: 5.7" (145mm)
- Air inlet size: 1/2" NPT
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.5 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.
- Available to order

1" (25mm) High Torque Extended Anvil Impact Wrench

Model No. 5092L



CE

- Reverse bias power
- Pin style impact mechanism
- Oil bath lubricant
- Moulded comfort grip
- Built-in power regulator
- Pin socket retainer
- Grade 5 bolt capacity 3/8" (10mm)
- Drive size 3/8" (10mm)
- Working torque 50-160 ft lb (68-217 Nm)
- Max. torque 185 ft lb (251 Nm)
- Free speed 8500 rpm
- Blows per minute 1,160
- Weight: 3.7lb (1.7 kg)
- Length: 6.3" (160mm)
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.4 cfm (100 l/s) avg. – 14.0 cfm (395 l/s) max.
- Available to order

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

1" (25mm) Impact Wrenches

1" (25mm) Impact Wrench

Model No. 5091A



- Pin impact mechanism
- Oil bath lubrication
- Built-in speed regulator
- Support handle
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity 1-3/8" (35mm)
- Drive size 1" (25mm)
- Working torque 500-1200 ft lb (675-1627 Nm)
- Max torque 1500 ft lb (2034 Nm)
- Free speed 4000rpm
- Blows per minute 785
- Weight: 16.8 lb (7.6 kg)
- Length: 14.4" (366 mm)
- Recommended hose size 3/4" (19mm)
- Air consumption 10.0 cfm (282 l/s) avg. – 40 cfm (1130 l/s) max.
- Standard stock

CE

1" (25mm) High Torque Impact Wrench

Model No. 5093



- Pin impact mechanism
- Oil bath lubrication
- Support handle
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity 1"- _" (38mm)
- Drive size 1" (25mm)
- Working torque range 600-1400 ft lb (813-2171898 Nm)
- Max torque 3000 ft lb (4068 Nm)
- Free speed: 4000 rpm
- Blows per minute 500
- Weight: 25.6lb (11.6 kg)
- Length: 15.1" (384mm)
- Air inlet size: _" NPT
- Recommended hose size _" (13mm)
- Air consumption 8.3 cfm (235 l/s) avg. – 33.2 cfm (938 l/s) max.
- Standard stock

CE

1" (25mm) Impact Wrench

Model No. 5091AL



- Pin impact mechanism
- 6" extended anvil
- Oil bath lubrication
- Built-in speed regulator
- Support handle
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity 1 - 3/8" (35mm)
- Drive size 1" (25mm)
- Working torque 450-1200 ft lb (610-1627 Nm)
- Max torque 1500 ft lb (2034 Nm)
- Free speed 4000rpm
- Blows per minute 785
- Weight: 18.5 lb (8.4 kg)
- Length: 19.3" (490mm)
- Recommended hose size: 3/4" (19mm)
- Air consumption 10 cfm (282 l/s) avg. – 40 cfm (1130 l/s) max.
- Standard stock

CE

1" (25mm) High Torque Impact Wrench

Model No. 5093L



- Pin impact mechanism
- 6" extended anvil
- Oil bath lubricant
- Support handle
- Friction ring and thru hole socket retainer
- Grade 5 bolt capacity 1-1/2" (38mm)
- Drive size 1" (25mm)
- Working torque 500-130 ft lb (675-1762 Nm)
- Max. torque 2700 ft lb (3661 Nm)
- Free speed 4000 rpm
- Blows per minute 500
- Weight: 28.0lb (12.7 kg)
- Length: 21.1" (536mm)
- Recommended hose size: _" (13mm)
- Air consumption 8.3 cfm (235 l/s) avg. – 33.2 cfm (938 l/s) max.
- Standard stock

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Ratchet Wrenches

1/4" (6mm) Ratchet Wrench

Model No. 5009



CE

- Steel angle head
- Aluminium housing
- Ergonomic composite grip
- Grade 5 bolt capacity 5/16" (8mm)
- Drive size 1/4" (6mm)
- Maximum torque 20 ft lb (27 Nm)
- Free speed 265 rpm
- Weight: 1.5 lb (0.5 kg)
- Length: 6.6" (168 mm)
- Air inlet size _" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 1.2 cfm (37 l/s) avg. – 5.2 cfm (147 l/s) max.
- Standard stock

3/8" (10mm) Ratchet Wrench

Model No. 5007



CE

- Steel angle head
- Aluminium housing
- Ergonomic composite grip
- Grade 5 bolt capacity 5/16" (8mm)
- Drive size 3/8" (10mm)
- Max torque 20 ft lb (27 Nm)
- Free speed: 265 rpm
- Weight: 1.3lb (0.55 kg)
- Length: 6.6" (168mm)
- Air inlet size: _" NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 1.4 cfm (37 l/s) avg. – 5.2 cfm (147 l/s) max.
- Standard stock

3/8" (10mm) Ratchet Wrench

Model No. 5011



CE

- Steel angle head
- Aluminium housing
- Ergonomic composite grip
- Grade 5 bolt capacity 7/16" (11mm)
- Drive size 3/8" (10mm)
- Max torque 50 ft lb (68 Nm)
- Free speed 185 rpm
- Blows per minute 785
- Weight: 2.6 lb (1.2 kg)
- Length: 10.8" (274mm)
- Air inlet size _" NPT
- Recommended hose size: 3/8" (10mm)
- Air consumption 3.0 cfm (85 l/s) avg. – 12.0 cfm (340 l/s) max.
- Standard stock

1/2" (13mm) Ratchet Wrench

Model No. 5013



CE

- Steel angle head
- Aluminium housing
- Ergonomic composite grip
- Grade 5 bolt capacity 7/16" (11mm)
- Drive size 1/2" (13mm)
- Max. torque 50 ft lb (68 Nm)
- Free speed 185 rpm
- Weight: 2.6lb (1.2 kg)
- Length: 10.8" (274mm)
- Air inlet size 1/42 NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.0 cfm (85 l/s) avg. – 12.0 cfm (340 l/s) max.
- Standard stock

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Straight Die Grinders

Light Duty Die Grinder

Model No. 5053AM6



- Lockoff lever throttle
- Comfort grip
- Front exhaust
- Built-in speed regulator
- Aluminium housing
- Power 0.3 hp (0.2 kw)
- Free speed 26,000 rpm
- Collet size M6
- Weight: 0.8 lb (0.4 kg)
- Length: 5.3" (135 mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Air consumption 4.0 cfm (113 l/s) avg. – 16.0 cfm (452 l/s) max.
- Standard stock

CE

Medium Duty Die Grinder

Model No. 5054AM6



- Lockoff lever throttle
- Comfort grip
- Rear exhaust
- Built-in speed regulator
- Aluminium housing
- Power 0.5 hp (0.4 kw)
- Free speed 22,000 rpm
- Collet size M6
- Weight: 1.3 lb (0.6 kg)
- Length: 6.5" (165 mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Air consumption 4.0 cfm (113 l/s) avg. – 16.0 cfm (452 l/s) max.
- Standard stock

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Right Angle Die Grinders

Heavy Duty Right Angle Die Grinder

Model No. 5055AM6



CE

- Lockoff lever throttle
- Comfort grip
- Aluminium housing
- Built-in speed regulator
- Power 0.3 hp (0.2 kw)
- Free speed 20,000 rpm
- Collet size M6
- Weight: 1.1 lb (0.5 kg)
- Length: 5.5" (140 mm)
- Head height 2.9" (74mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 4.0 cfm (113 l/s) avg. – 16.0 cfm (452 l/s) max.
- Standard stock

4" (115mm) Right Angle Heavy Duty Grinder

Model No. 5268



CE

- Aluminium housing
- Lockoff lever throttle
- Built-in speed regulator
- Free speed 12,000 rpm
- Spindle size 5/8" - 11
- Weight: 3.9 lb (1.7 kg)
- Length: 10.0" (254 mm)
- Head height 3.5" (90mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.3 cfm (94 l/s) avg. – 13.2 cfm (373 l/s) max.
- Available to order

5" (127mm) Right Angle Heavy Duty Grinder

Model No. 5285



CE

- Aluminium housing
- Lockoff lever throttle
- Built-in speed regulator
- Free speed 12,000 rpm
- Spindle size 5/8" - 11
- Weight: 3.9 lb (1.7 kg)
- Length: 10.0" (254 mm)
- Head height 3.5" (90mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size 3/8" (10mm)
- Air consumption 3.3 cfm (94 l/s) avg. – 13.2 cfm (373 l/s) max.
- Available to order

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Sanders

Micro Surface Prep Tool

Model No. 5200

- Two-finger variable speed trigger
- Built-in speed regulator
- Down handle exhaust
- Free speed 15,000 rpm
- Weight 1.3lb (0.6kg)
- Length 3.8" (97mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Spindle thread $\frac{1}{8}$ " - 20
- 2" Roloc™ pad included
- Air consumption 2.5 cfm (70 l/s) avg. - 10.0 cfm (282 l/s) max.
- Standard stock



CE

Pistol Grip Sander

Model No. 5540

- Aluminium housing
- Built-in speed regulator
- Free speed 14,000 rpm
- Weight 2.2lb (1.0kg)
- Length 4.3" (109mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Spindle thread $\frac{7}{16}$ " - 20
- Recommended hose size $\frac{3}{8}$ " (10mm)
- 3" (75mm) and 4 - $\frac{1}{2}$ " (115mm) backing pads included
- Air consumption 12.0 cfm (340 l/s) avg. - 30.0 cfm (847 l/s) max.
- Available to order



CE

5" (125mm) Right Angle Air Sander

Model No. 5265

- Lockoff lever throttle
- Safety lever throttle
- Removable auxiliary handle and wrenches
- Built-in speed regulator
- Rear exhaust
- Backing pad for 5" (125mm) abrasives included
- Free speed 7000 rpm
- Pad diameter 7" (180mm)
- Weight 2.9lb (1.3kg)
- Length 9.4" (240mm)
- Spindle thread $\frac{5}{8}$ " - 11
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Air consumption 4.5 cfm (127 l/s) avg. - 18.0 cfm (508 l/s) max.
- Available to order



CE

Right Angle Sander

Model No. 5287A

- Lockoff lever throttle
- Support handle can be mounted on either side
- Built-in speed regulator
- Rear exhaust
- Backing pad for 7" (180mm) abrasives included
- Free speed 6000 rpm
- Pad diameter 7" (180mm)
- Weight 4.4lb (2.0kg)
- Length 12.6" (320mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Spindle thread $\frac{5}{8}$ " - 11
- Air consumption 4.8 cfm (135 l/s) avg. - 19.2 cfm (542 l/s) max.
- Standard stock



CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Sanders/Micro Polishers

Geared Random Orbital Sander

Model No. 5557

- Geared output
- Built-in speed regulator
- Built-in hand guard
- Vinyl grip and head cover
- Free speed 850 rpm
- Pad diameter 8" (200mm)
- Weight 4.8 lb (2.2kg)
- Height 4.7" (119mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- 8" (200mm) backing pad included
- Air consumption (5.0 cfm (142 l/s) avg. – 20.0 cfm (565 l/s) max.
- Available to order



CE

Dual Pistol Inline Sander

Model No. 5560

- Dual handles
- Positive lock paper clamps
- 2500 spm (strokes per minute)
- Paper size 2-3/4" x 17-1/2" (70 x 445mm)
- Weight 6.8 lb (3.1kg)
- Height 16" (406mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Air consumption (3.0 cfm (85 l/s) avg. – 12.0 cfm (340 l/s) max.
- Available to order



CE

Dual Action Sander

Model No. 5558A

- Built-in speed regulator
- Dual action sanding
- Vinyl grip and head cover
- Free speed 10,000 rpm
- Pad diameter 6" (150mm)
- Weight 4.3 lb (2.0 kg)
- Height 5.4" (137mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Sound level 79 dB(A)
- 6" (150mm) backing pad included
- Air consumption (5.0 cfm (142 l/s) avg. – 10.0 cfm (282 l/s) max.
- Standard stock



CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Hammers

Hammer

Model No. 5272A




- Spring retainer
- Accepts 401 parker taper shanks
- Hardened steel barrel and piston
- Built-in air regulator
- Aluminium housing
- Stroke length 1.6" (41mm)
- Bore diameter 0.8" (20mm)
- Blows per minute 4800
- Weight 3.0 lb (1.4kg)
- Length 5.8" (147mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Standard stock

CE

Hammer

Model No. 5274A

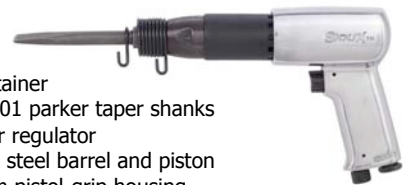

- Spring retainer
- Accepts 401 parker taper shanks
- Built-in air regulator
- Hardened steel barrel and piston
- Aluminium pistol-grip housing
- Stroke length 3.8" (97mm)
- Bore diameter 0.8" (20mm)
- Blows per minute 2200
- Weight 4.7 lb (2.1kg)
- Length 9.3" (236mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Standard stock

CE

Hammer

Model No. 5273A



- Spring retainer
- Accepts 401 parker taper shanks
- Built-in air regulator
- Hardened steel barrel and piston
- Aluminium housing
- Stroke length 2.6" (66mm)
- Bore diameter 0.8" (20mm)
- Blows per minute 3200
- Weight 3.8 lb (1.7kg)
- Length 7.1" (180mm)
- Air inlet size $\frac{1}{4}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Available to order

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Scalers

Weld Flux Scaler

Model No. 5264



- Steel housing
- Quick-change ball-lock retainer
- Hardened steel barrel and piston
- Stroke length 2.0" (50mm)
- Bore diameter 1.0" (25mm)
- Blows per minute 4000
- Weight 5.7 lb (2.6kg)
- Length 13.0" (330mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Available to order

CE

Mini Needle Scaler

Model No. 5263



- Steel housing
- Hardened steel barrel and piston
- Stroke length 2.0" (51mm)
- Bore diameter 7.0" (18mm)
- Blows per minute 4000
- Weight 2.6 lb (1.2kg)
- Length 11.4" (290mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- 19 – 0.12" (3mm) Dia. X 5" (125mm) long needles included
- Available to order

CE

Pistol Grip Needle Scaler

Model No. 5262



- Comfort grip
- Hardened steel barrel and piston
- Stroke length 3.0" (75mm)
- Bore diameter 0.9" (23mm)
- Blows per minute 3000
- Weight 5.7 lb (2.6kg)
- Length 10.0" (254mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- 12 – 0.12" (3mm) Dia. X 7" (180mm) long needles included
- Available to order

CE

Needle Scaler

Model No. 5266



- Steel housing
- Hardened steel barrel and piston
- Stroke length 2.0" (51mm)
- Bore diameter 1.0" (25mm)
- Blows per minute 4000
- Weight 5.7 lb (2.6kg)
- Length 16.1" (4.9mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- 19 – 0.12" (3mm) Dia. X 7" (180mm) long needles included
- Standard stock

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

Speciality Tools

Reciprocating Air Saw

Model No. 5300



- 10,000 Strokes per minute
- Adjustable blade guard
- Lockoff lever throttle
- Built-in speed regulator
- Weight 1.3 lb (0.06kg)
- Length 11.0" (279mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- 2" (50mm) and 4" (100mm) blade guard 2" (50mm)
- Available to order

Cut-off Tool

Model No. 5564A



CE

- Rear exhaust
- Comfort grip
- Lockoff lever throttle
- Aluminium housing
- Free speed 21,000 rpm
- Wheel size 3.0" (76mm)
- Weight 1.8 lb (0.08kg)
- Length 8.0" (203mm)
- Air inlet size $\frac{1}{2}$ " NPT
- Recommended hose size $\frac{3}{8}$ " (10mm)
- Standard stock

CE

SAFETY PRECAUTIONS:

Read and follow all safety and operating instructions.

WARNING: Face & eye protection must be worn while operating power tools.

